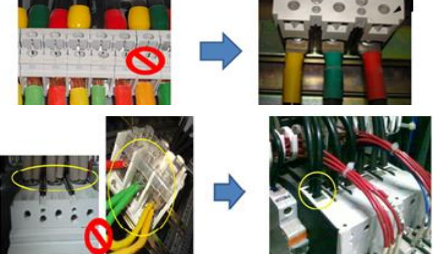
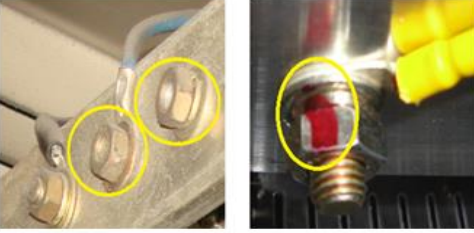


 PT. MNA SERANG	WORKING INSTRUCTION PM System Cabinet Cleaning and Inspection	WI/MNA-E&I-19-217	
		Dept.	ENGINEERING
		Section	E&I
		Revision	0
		Effective Date	
		Page	1 of 3

Instruksi / Instruction Persiapan Maintenance / Prepare of Maintenance	
	
Siapkan peralatan dan APD (<i>Prepare equipment and APD</i>)	
Maintenance Action	

 	
---	--

Bersihkan panel dan komponen dalam panel (<i>Cleaning panel and component inside panel</i>)	Rapikan kabel yang ada di dalam panel (<i>tidy the cable inside panel</i>)
	

Periksa seluruh bagian panel apakah terdapat kecacatan pada panel (<i>Checking all of part panel when any damage in the panel</i>)	Pastikan base plate, ventilasi, PE, kunci dan penyangga pintu terpasang dengan baik (<i>make sure base plate, ventilation, PE, keys and door holder already installed</i>)
	

Pastikan terminasi kabel sudah sempurna dan jumlah terminasi sesuai dengan jumlah kabel (<i>make sure cable termination already terminated and perfectly</i>)	Pastikan kekencangan setiap baut baut dan terminasi (<i>make sure bolt and termination tightened</i>)
---	---